

DIAMOND

SINGLE, TANDEM AXLE BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

DCS | Light-weight
clean side body

DLS | Municipal & contractor
light-weight body

DHS | Municipal & contractor
heavy duty body

	DCS	DLS	DHS
TOP RAIL	Open "C" fold to the inside 48" side – 3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing
SIDES	1/8" – HARDOX 450	1/8" – HARDOX 450	4 mm (5/32") – HARDOX 450
SIDE POSTS	NONE	NONE	NONE
FRONT	1/8" – HARDOX 450	1/8" – HARDOX 450	4 mm (5/32") – HARDOX 450
TAILGATE	4.5 mm (3/16") – HARDOX 450	4 mm (5/32") – HARDOX 450	4.5 mm (3/16") – HARDOX 450
FLOOR	4.5 mm (3/16") – HARDOX 450	4 mm (5/32") – HARDOX 450	4.5 mm (3/16") – HARDOX 450
SILLS	3/16" – 44-W	3/16" – 44-W	3/16" – 44-W
SILLS (13' 6"+)	0.2242" – 44-W	0.2242" – 44-W	0.2242" – 44-W
BODY WEIGHT	2,536 lbs Based on a 10' x 30" x 36" DCS	2,540 lbs Based on a 10' x 30" x 36" DLS	2,697 lbs Based on a 10' x 30" x 36" DHS
STANDARD BODY LENGTHS	9' to 16'	9' to 16'	9' to 16'
STANDARD SIDE HEIGHTS	24", 30", 36", 42"*, 48"* (* : two fold side design)	24", 30", 36"	24", 30", 36"
STANDARD TAILGATE HEIGHTS	30", 36", 42", 48", 54", 60"	30", 36", 42", 48"	30", 36", 42", 48"
STANDARD INSIDE WIDTH	86" to 88" trapezoidal design	86" to 88" trapezoidal design	86" to 88" trapezoidal design
STANDARD HOIST SYSTEM	Front Mount Telescopic	Front Mount Telescopic	Front Mount Telescopic
OPTIONAL HOIST SYSTEM	Underbody Hoist	Underbody Hoist	Underbody Hoist

MATERIALS

SPECIFICATIONS

ONLY BEAU-ROC DELIVERS “THE DIAMOND STANDARD”



- Responsive custom design with efficient, on-time delivery from modern 60,000 sq. ft. facility
- Maximum productivity with the original Diamond sidewall profile
- More years and more miles of service with HARDOX 450 steel
- Lowest total operating cost for the life of your truck

A ROCK SOLID INVESTMENT

- **More pay per load:** No posts and braces means less weight without losing cubic capacity
- **100% HARDOX 450 steel body:** Proven wear-resistance for best in industry durability
- **Save on every mile:** Up to 7% fuel savings
- **Less wear, fewer repairs:** Diamond profile flexes instead of breaking under normal stresses
- **Quicker clean-outs:** One-piece tapered floor eliminates catch points for loads
- **Faster delivery:** Fewer weld points save time in production
- **The best look for your business:** Clean, smooth sidewalls for signage and decals

NEED A QUOTE NOW?

Our detailed product database allows us to configure your order in real time. We provide custom quotations to our dealers quickly, then follow through with a seamless flow of production details for manufacturing.



300 Universelle Street
Vars, Ontario, Canada K0A 3H0
Tel: 613.443.0044 – Fax: 613.443.1138



DIAMOND

BARREL BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

DBL | An ideal body for excavation & light demolition work

DBH | Ideal for heavy duty quarry & demolition work

	DBL	DBH	
	4" x 6" x 3/16" tubing	4" x 6" x 1/4" tubing	TOP RAIL
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	SIDES
MATERIALS	NONE	NONE	SIDE POSTS
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	FRONT
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	TAILGATE
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	FLOOR
	1/4" – 44-W	1/4" – 44-W	SILLS
	4,948 lbs Based on a 17'6" x 54" x 60" DBL	5,744 lbs Based on a 17'6" x 54" x 60" DBH	BODY WEIGHT
SPECIFICATIONS	13' to 22'	13' to 22'	STANDARD BODY LENGTHS
	42" to 66"	42" to 66"	STANDARD SIDE HEIGHTS
	42" to 72"	42" to 72"	STANDARD TAILGATE HEIGHTS
	88"	88"	STANDARD INSIDE WIDTH
	Front Mount Telescopic	Front Mount Telescopic	STANDARD HOIST SYSTEM
	Underbody Hoist	Underbody Hoist	OPTIONAL HOIST SYSTEM

ONLY BEAU-ROC DELIVERS “THE DIAMOND STANDARD”



- Responsive custom design with efficient, on-time delivery from modern 60,000 sq. ft. facility
- Maximum productivity with the original Diamond sidewall profile
- More years and more miles of service with HARDOX 450 steel
- Lowest total operating cost for the life of your truck

A ROCK SOLID INVESTMENT

- **More pay per load:** No posts and braces means less weight without losing cubic capacity
- **100% HARDOX 450 steel body:** Proven wear-resistance for best in industry durability
- **Save on every mile:** Up to 7% fuel savings
- **Less wear, fewer repairs:** Diamond profile flexes instead of breaking under normal stresses
- **Quicker clean-outs:** One-piece tapered floor eliminates catch points for loads
- **Faster delivery:** Fewer weld points save time in production
- **The best look for your business:** Clean, smooth sidewalls for signage and decals

NEED A QUOTE NOW?

Our detailed product database allows us to configure your order in real time. We provide custom quotations to our dealers quickly, then follow through with a seamless flow of production details for manufacturing.



300 Universelle Street
Vars, Ontario, Canada K0A 3H0
Tel: 613.443.0044 – Fax: 613.443.1138



DIAMOND

TANDEM, MULTI-LIFT AXLE BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

DL | The ultimate solution for weight sensitive versatile work

DH | No compromise rough duty dump body

	DL	DH	
	3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing	TOP RAIL
	4 mm (5/32") – HARDOX 450	4.5 mm (3/16") – HARDOX 450	SIDES
MATERIALS	NONE	NONE	SIDE POSTS
	4 mm (5/32") – HARDOX 450	4.5 mm (3/16") – HARDOX 450	FRONT
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	TAILGATE
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	FLOOR
	3/16" – Domex 100W	3/16" – Domex 100W	SILLS
	4,378 lbs Based on a 17' x 48" x 60" DL	4,989 lbs Based on a 17' x 48" x 60" DH	BODY WEIGHT
SPECIFICATIONS	13' to 24'	13' to 24'	STANDARD BODY LENGTHS
	36", 42", 48", 54", 60", 66", 70"	36", 42", 48", 54", 60", 66", 70"	STANDARD SIDE HEIGHTS
	36", 42", 48", 54", 60", 66", 72"	36", 42", 48", 54", 60", 66", 72"	STANDARD TAILGATE HEIGHTS
	86" to 88" trapezoidal design	86" to 88" trapezoidal design	STANDARD INSIDE WIDTH
	Front Mount Telescopic	Front Mount Telescopic	STANDARD HOIST SYSTEM
	Underbody Hoist	Underbody Hoist	OPTIONAL HOIST SYSTEM

ONLY BEAU-ROC DELIVERS “THE DIAMOND STANDARD”



- Responsive custom design with efficient, on-time delivery from modern 60,000 sq. ft. facility
- Maximum productivity with the original Diamond sidewall profile
- More years and more miles of service with HARDOX 450 steel
- Lowest total operating cost for the life of your truck

A ROCK SOLID INVESTMENT

- **More pay per load:** No posts and braces means less weight without losing cubic capacity
- **100% HARDOX 450 steel body:** Proven wear-resistance for best in industry durability
- **Save on every mile:** Up to 7% fuel savings
- **Less wear, fewer repairs:** Diamond profile flexes instead of breaking under normal stresses
- **Quicker clean-outs:** One-piece tapered floor eliminates catch points for loads
- **Faster delivery:** Fewer weld points save time in production
- **The best look for your business:** Clean, smooth sidewalls for signage and decals

NEED A QUOTE NOW?

Our detailed product database allows us to configure your order in real time. We provide custom quotations to our dealers quickly, then follow through with a seamless flow of production details for manufacturing.



300 Universelle Street
Vars, Ontario, Canada K0A 3H0
Tel: 613.443.0044 – Fax: 613.443.1138



DIAMOND

ELLIPTICAL BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

RXL | A versatile body for all your heavy duty applications

RXH | An ideal choice for all your super duty needs

TOP RAIL	4" x 4" x 3/16" tubing	4" x 4" x 1/4" tubing
SIDES	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
SIDE POSTS	NONE	NONE
FRONT	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
TAILGATE	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
FLOOR	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
SILLS	1/4" – 44-W	1/4" – 44-W
BODY WEIGHT	5,118 lbs Based on a 17'6" x 54" x 60" RXL	6,080 lbs Based on a 17'6" x 54" x 60" RXH
STANDARD BODY LENGTHS	10' to 20'	10' to 20'
STANDARD SIDE HEIGHTS	36" to 66"	36" to 66"
STANDARD TAILGATE HEIGHTS	36" to 72"	36" to 72"
STANDARD INSIDE WIDTH	88"	88"
STANDARD HOIST SYSTEM	Front Mount Telescopic	Front Mount Telescopic
OPTIONAL HOIST SYSTEM	Underbody Hoist	Underbody Hoist

MATERIALS

SPECIFICATIONS

ONLY BEAU-ROC DELIVERS “THE DIAMOND STANDARD”



- Responsive custom design with efficient, on-time delivery from modern 60,000 sq. ft. facility
- Maximum productivity with the original Diamond sidewall profile
- More years and more miles of service with HARDOX 450 steel
- Lowest total operating cost for the life of your truck

A ROCK SOLID INVESTMENT


- **More pay per load:** No posts and braces means less weight without losing cubic capacity
- **100% HARDOX 450 steel body:** Proven wear-resistance for best in industry durability
- **Save on every mile:** Up to 7% fuel savings
- **Less wear, fewer repairs:** Diamond profile flexes instead of breaking under normal stresses
- **Quicker clean-outs:** One-piece tapered floor eliminates catch points for loads
- **Faster delivery:** Fewer weld points save time in production
- **The best look for your business:** Clean, smooth sidewalls for signage and decals

NEED A QUOTE NOW?

Our detailed product database allows us to configure your order in real time. We provide custom quotations to our dealers quickly, then follow through with a seamless flow of production details for manufacturing.



300 Universelle Street
Vars, Ontario, Canada K0A 3H0
Tel: 613.443.0044 – Fax: 613.443.1138

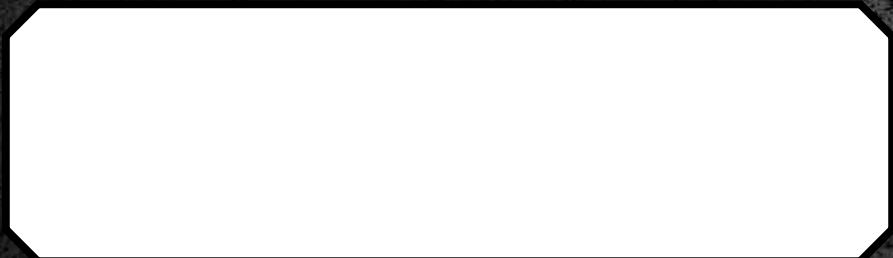

CLEAN SIDE BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

CSS | Clean side body
standard & commercial market

CSM | Domex clean side body
Municipal & commercial market

TOP RAIL	Open "C" fold to the inside	Open "C" fold to the inside
SIDES	3/16" – 44-W	3/16" – Domex 100W
SIDE POSTS	NONE	NONE
FRONT	3/16" – 44-W	3/16" – Domex 100W
TAILGATE	3/16" – 44-W	3/16" – Domex 100W
FLOOR	3/16" – 44-W	1/4" – AR225
SILLS	3/16" – 44-W	3/16" – Domex 100W
SILLS (13' 6"+)	0.2242" – 44-W	3/16" – Domex 100W
BODY WEIGHT	2,810 lbs Based on a 10' x 30" x 36" CSS	3,014 lbs Based on a 10' x 30" x 36" CSM
STANDARD BODY LENGTHS	9' to 16'	9' to 16'
STANDARD SIDE HEIGHTS	24", 30", 36", 42"	24", 30", 36", 42"
STANDARD TAILGATE HEIGHTS	30", 36", 42", 48"	30", 36", 42", 48"
STANDARD INSIDE WIDTH	86" to 88" trapezoidal design	86" to 88" trapezoidal design
STANDARD HOIST SYSTEM	Front Mount Telescopic	Front Mount Telescopic
OPTIONAL HOIST SYSTEM	Underbody Hoist	Underbody Hoist

MATERIALS

SPECIFICATIONS

ONLY BEAU-ROC DELIVERS “THE DIAMOND STANDARD”



- Responsive custom design with efficient, on-time delivery from modern 60,000 sq. ft. facility
- Maximum productivity with the original Diamond sidewall profile
- More years and more miles of service with HARDOX 450 steel
- Lowest total operating cost for the life of your truck

A ROCK SOLID INVESTMENT

- **More pay per load:** No posts and braces means less weight without losing cubic capacity
- **100% HARDOX 450 steel body:** Proven wear-resistance for best in industry durability
- **Save on every mile:** Up to 7% fuel savings
- **Less wear, fewer repairs:** Diamond profile flexes instead of breaking under normal stresses
- **Quicker clean-outs:** One-piece tapered floor eliminates catch points for loads
- **Faster delivery:** Fewer weld points save time in production
- **The best look for your business:** Clean, smooth sidewalls for signage and decals

NEED A QUOTE NOW?

Our detailed product database allows us to configure your order in real time. We provide custom quotations to our dealers quickly, then follow through with a seamless flow of production details for manufacturing.



300 Universelle Street
Vars, Ontario, Canada K0A 3H0
Tel: 613.443.0044 – Fax: 613.443.1138



TRADITIONAL BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

	HS Light duty dump body for single axle trucks	HT Medium duty dump body for tandem, lift axle trucks	HT-NE Heavy duty dump body for tandem, lift axle trucks	
MATERIALS	3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing	TOP RAIL
	3/16" – 44-W	3/16" – 44-W	3/16" – 44-W	SIDES
	10g (0.134") – A-36	10g (0.134") – A-36	10g (0.134") – A-36	SIDE POSTS
	3/16" – 44-W	3/16" – 44-W	3/16" – 44-W	FRONT
	1/4" – AR225	1/4" – AR225	4.5 mm (3/16") – HARDOX 450	TAILGATE
	1/4" – AR225	1/4" – AR225	4.5 mm (3/16") – HARDOX 450	FLOOR
	3/16" – 44-W	0.2242" – 44-W	0.2242" – 44-W	SILLS
0.2242" – 44-W (13' 6"+)	1/4" – 44-W (16' 6"+)	1/4" – 44-W (16' 6"+)	SILLS +	
3,220 lbs Based on a 10' x 30" x 36" HS	5,834 lbs Based on a 17' x 48" x 60" HT	5,316 lbs Based on a 17' x 48" x 60" HT-NE	BODY WEIGHT	
9' to 16'	13' to 18'	13' to 18'	STANDARD BODY LENGTHS	
24" to 36"	36" to 54"	36" to 54"	STANDARD SIDE HEIGHTS	
30" to 48"	36" to 60"	36" to 60"	STANDARD TAILGATE HEIGHTS	
86" to 88" trapezoidal design	86" to 88" trapezoidal design	86" to 88" trapezoidal design	STANDARD INSIDE WIDTH	
Front Mount Telescopic	Front Mount Telescopic	Front Mount Telescopic	STANDARD HOIST SYSTEM	
Underbody Hoist	Underbody Hoist	Underbody Hoist	OPTIONAL HOIST SYSTEM	

TRADITIONAL BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

LTT | The industry standard for weight sensitive versatile work

HTT | The industry standard for the roughest work

TOP RAIL	3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing
SIDES	1/8" – HARDOX 450	4.5 mm (3/16") – HARDOX 450
SIDE POSTS	10g (0.134") – A-36	10g (0.134") – A-36
FRONT	1/8" – HARDOX 450	4.5 mm (3/16") – HARDOX 450
TAILGATE	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
FLOOR	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
SILLS	1/4" – 44-W	1/4" – 44-W
SILLS +	8" or 10" I-Beams – (Optional)	8" or 10" I-Beams – (Optional)
BODY WEIGHT	4,796 lbs Based on a 17' x 48" x 60" LTT	5,867 lbs Based on a 17' x 48" x 60" HTT
STANDARD BODY LENGTHS	10' to 23'	10' to 23'
STANDARD SIDE HEIGHTS	36" to 72"	36" to 72"
STANDARD TAILGATE HEIGHTS	36" to 72"	36" to 72"
STANDARD INSIDE WIDTH	86" to 88" trapezoidal design	86" to 88" trapezoidal design
STANDARD HOIST SYSTEM	Front Mount Telescopic	Front Mount Telescopic
OPTIONAL HOIST SYSTEM	Underbody Hoist	Underbody Hoist

MATERIALS

SPECIFICATIONS

ULTRA

BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

One Ton | Premier light-weight drop side body

Contractor | Premier light-weight double drop side body

	One Ton	Contractor	
	11g (1/8") – Domex 100W	11g (1/8") – Domex 100W	SIDES
	11g (1/8") – Domex 100W	11g (1/8") – Domex 100W	SIDE POSTS
MATERIALS	11g (1/8") – Domex 100W	11g (1/8") – Domex 100W	FRONT
	11g (1/8") – Domex 100W	11g (1/8") – Domex 100W	TAILGATE
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	FLOOR
	8" C-Channel	10" C-Channel with support flange	SILLS
	*Optional C5" over C4"	NONE	SUB-FRAME
	1,961 lbs Based on a 11' x 15" x 24" One ton (with sub-frame)	3,053 lbs Based on a 14' x 15" x 24" Contractor (double drop sides)	BODY WEIGHT
SPECIFICATIONS	8' 6" to 12' 6"	13' to 18'	STANDARD BODY LENGTHS
	12", 15", 18"	12", 15", 18", 20"	STANDARD SIDE HEIGHTS
	20", 24", 28"	20", 24", 28"	STANDARD TAILGATE HEIGHTS
	88"	88"	STANDARD INSIDE WIDTH
	Front Mount Telescopic (6" recess)	Front Mount Telescopic (12" recess)	STANDARD HOIST SYSTEM
	Underbody Hoist	Underbody Hoist	OPTIONAL HOIST SYSTEM

* Sub-Frame Package Available

ONLY BEAU-ROC DELIVERS “THE DIAMOND STANDARD”



- Responsive custom design with efficient, on-time delivery from modern 60,000 sq. ft. facility
- Maximum productivity with the original Diamond sidewall profile
- More years and more miles of service with HARDOX 450 steel
- Lowest total operating cost for the life of your truck

A ROCK SOLID INVESTMENT

- **More pay per load:** No posts and braces means less weight without losing cubic capacity
- **100% HARDOX 450 steel body:** Proven wear-resistance for best in industry durability
- **Save on every mile:** Up to 7% fuel savings
- **Less wear, fewer repairs:** Diamond profile flexes instead of breaking under normal stresses
- **Quicker clean-outs:** One-piece tapered floor eliminates catch points for loads
- **Faster delivery:** Fewer weld points save time in production
- **The best look for your business:** Clean, smooth sidewalls for signage and decals


NEED A QUOTE NOW?

Our detailed product database allows us to configure your order in real time. We provide custom quotations to our dealers quickly, then follow through with a seamless flow of production details for manufacturing.



300 Universelle Street
Vars, Ontario, Canada K0A 3H0
Tel: 613.443.0044 – Fax: 613.443.1138



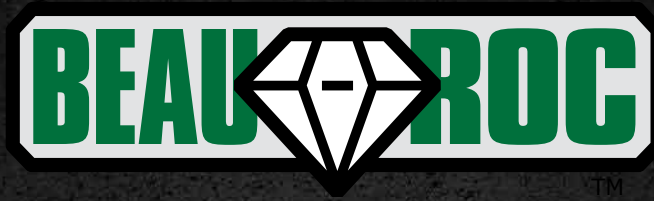

WWW.BEAUROC.COM



**DUMP BODIES THAT STAND
THE PRESSURE OF TIME**
PRODUCT CATALOGUE

TABLE OF CONTENTS

BODY OPTIONS

2

DIAMOND

SINGLE, TANDEM AXLE BODY LINE

3

DIAMOND

TANDEM, MULTI-LIFT AXLE BODY LINE

4

DIAMOND

ELLIPTICAL BODY LINE

5

DIAMOND

BARREL BODY LINE

6

CLEAN SIDE

BODY LINE

7

TRADITIONAL

BODY LINE

8-9

ULTRA

BODY LINE

10

STAINLESS STEEL

SS201 & SS304 BODY LINE

11

ABOUT BEAU-ROC

12

	DLS & DRS	DCS	DL & DH	DBL & DBH	RXL & RXH	One-Ton	Contractor	CSS & CSM	HS	HT & HT-NE	LTT & HTT	SSM1 & SSM4
COAL DOORS	◆	◆	◆	◇	◇	▲	▲	◆	◆	◆	◆	◆
DOUBLE-ACTING TAILGATE	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
ASPHALT TAIL	◆	◆	◆		◆			◆	◆	◆	◆	◆
SIDE OPENING TAILGATE	◆	◆	◆	◆	◆			◆	◆	◆	◆	
AIR/HYDRAULIC HIGH-LIFT TAILGATES			◆	◆	◆					◆	◆	
AUTOMATIC TAILGATE			◆							◆	◆	
10" LONG SILLS	◆	◆	◆		◆	◆	◆	◆	◆	◆	◆	◆
HOOK-LIFT FRAME	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
TAPERED SIDES			◆	◆	◆			◆	◆	◆	◆	◆
FOLD DOWN SIDES						◆	◆					
SUB-FRAME PACKAGE						◆						
TARP RAILS	◆	◆	◆	◆	◆			◆	◆	◆	◆	◆
UNDERBODY HOIST SYSTEM	◆	◆	◆		◆	◆	◆	◆	◆	◆	◆	◆

◇ = One centered coal door only ▲ = 28" tailgate height only

BODY OPTIONS

**Tensile strength
by grade of steel
measured in PSI**

HARDOX 450 – 215,000
Domex 100W – 115,000*
AR225 – 105,000
SS201 2B – 95,000
44-W – 80,000
SS304 2B – 74,700
A-36 – 65,000

* Weather resistant steel.

DIAMOND

SINGLE, TANDEM AXLE BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

DCS | Light-weight
clean side body

DLS | Municipal & contractor
light-weight body

DHS | Municipal & contractor
heavy duty body

	DCS	DLS	DHS
TOP RAIL	Open "C" fold to the inside 48" side – 3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing
SIDES	1/8" – HARDOX 450	1/8" – HARDOX 450	4 mm (5/32") – HARDOX 450
SIDE POSTS	NONE	NONE	NONE
FRONT	1/8" – HARDOX 450	1/8" – HARDOX 450	4 mm (5/32") – HARDOX 450
TAILGATE	4.5 mm (3/16") – HARDOX 450	4 mm (5/32") – HARDOX 450	4.5 mm (3/16") – HARDOX 450
FLOOR	4.5 mm (3/16") – HARDOX 450	4 mm (5/32") – HARDOX 450	4.5 mm (3/16") – HARDOX 450
SILLS	3/16" – 44-W	3/16" – 44-W	3/16" – 44-W
SILLS (13' 6"+)	0.2242" – 44-W	0.2242" – 44-W	0.2242" – 44-W
BODY WEIGHT	2,536 lbs Based on a 10' x 30" x 36" DCS	2,540 lbs Based on a 10' x 30" x 36" DLS	2,697 lbs Based on a 10' x 30" x 36" DHS
STANDARD BODY LENGTHS	9' to 16'	9' to 16'	9' to 16'
STANDARD SIDE HEIGHTS	24", 30", 36", 42"*, 48"* (* : two fold side design)	24", 30", 36"	24", 30", 36"
STANDARD TAILGATE HEIGHTS	30", 36", 42", 48", 54", 60"	30", 36", 42", 48"	30", 36", 42", 48"
STANDARD INSIDE WIDTH	86" to 88" trapezoidal design	86" to 88" trapezoidal design	86" to 88" trapezoidal design
STANDARD HOIST SYSTEM	Front Mount Telescopic	Front Mount Telescopic	Front Mount Telescopic
OPTIONAL HOIST SYSTEM	Underbody Hoist	Underbody Hoist	Underbody Hoist

MATERIALS

SPECIFICATIONS

DIAMOND

TANDEM, MULTI-LIFT AXLE BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

DL | The ultimate solution for weight sensitive versatile work

DH | No compromise rough duty dump body

	DL	DH	
	3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing	TOP RAIL
	4 mm (5/32") – HARDOX 450	4.5 mm (3/16") – HARDOX 450	SIDES
MATERIALS	NONE	NONE	SIDE POSTS
	4 mm (5/32") – HARDOX 450	4.5 mm (3/16") – HARDOX 450	FRONT
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	TAILGATE
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	FLOOR
	3/16" – Domex 100W	3/16" – Domex 100W	SILLS
	4,378 lbs Based on a 17' x 48" x 60" DL	4,989 lbs Based on a 17' x 48" x 60" DH	BODY WEIGHT
SPECIFICATIONS	13' to 24'	13' to 24'	STANDARD BODY LENGTHS
	36", 42", 48", 54", 60", 66", 70"	36", 42", 48", 54", 60", 66", 70"	STANDARD SIDE HEIGHTS
	36", 42", 48", 54", 60", 66", 72"	36", 42", 48", 54", 60", 66", 72"	STANDARD TAILGATE HEIGHTS
	86" to 88" trapezoidal design	86" to 88" trapezoidal design	STANDARD INSIDE WIDTH
	Front Mount Telescopic	Front Mount Telescopic	STANDARD HOIST SYSTEM
	Underbody Hoist	Underbody Hoist	OPTIONAL HOIST SYSTEM

DIAMOND

ELLIPTICAL BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

RXL | A versatile body for all your heavy duty applications

RXH | An ideal choice for all your super duty needs

TOP RAIL	4" x 4" x 3/16" tubing	4" x 4" x 1/4" tubing
SIDES	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
SIDE POSTS	NONE	NONE
FRONT	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
TAILGATE	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
FLOOR	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
SILLS	1/4" – 44-W	1/4" – 44-W
BODY WEIGHT	5,118 lbs Based on a 17'6" x 54" x 60" RXL	6,080 lbs Based on a 17'6" x 54" x 60" RXH
STANDARD BODY LENGTHS	10' to 20'	10' to 20'
STANDARD SIDE HEIGHTS	36" to 66"	36" to 66"
STANDARD TAILGATE HEIGHTS	36" to 72"	36" to 72"
STANDARD INSIDE WIDTH	88"	88"
STANDARD HOIST SYSTEM	Front Mount Telescopic	Front Mount Telescopic
OPTIONAL HOIST SYSTEM	Underbody Hoist	Underbody Hoist

MATERIALS

SPECIFICATIONS

DIAMOND

BARREL BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

DBL | An ideal body for excavation & light demolition work

DBH | Ideal for heavy duty quarry & demolition work

	DBL	DBH	
	4" x 6" x 3/16" tubing	4" x 6" x 1/4" tubing	TOP RAIL
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	SIDES
MATERIALS	NONE	NONE	SIDE POSTS
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	FRONT
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	TAILGATE
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	FLOOR
	1/4" – 44-W	1/4" – 44-W	SILLS
	4,948 lbs Based on a 17'6" x 54" x 60" DBL	5,744 lbs Based on a 17'6" x 54" x 60" DBH	BODY WEIGHT
SPECIFICATIONS	13' to 22'	13' to 22'	STANDARD BODY LENGTHS
	42" to 66"	42" to 66"	STANDARD SIDE HEIGHTS
	42" to 72"	42" to 72"	STANDARD TAILGATE HEIGHTS
	88"	88"	STANDARD INSIDE WIDTH
	Front Mount Telescopic	Front Mount Telescopic	STANDARD HOIST SYSTEM
	Underbody Hoist	Underbody Hoist	OPTIONAL HOIST SYSTEM

CLEAN SIDE BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

CSS | Clean side body
standard & commercial market

CSM | Domex clean side body
Municipal & commercial market

TOP RAIL	Open "C" fold to the inside	Open "C" fold to the inside
SIDES	3/16" – 44-W	3/16" – Domex 100W
SIDE POSTS	NONE	NONE
FRONT	3/16" – 44-W	3/16" – Domex 100W
TAILGATE	3/16" – 44-W	3/16" – Domex 100W
FLOOR	3/16" – 44-W	1/4" – AR225
SILLS	3/16" – 44-W	3/16" – Domex 100W
SILLS (13' 6"+)	0.2242" – 44-W	3/16" – Domex 100W
BODY WEIGHT	2,810 lbs Based on a 10' x 30" x 36" CSS	3,014 lbs Based on a 10' x 30" x 36" CSM
STANDARD BODY LENGTHS	9' to 16'	9' to 16'
STANDARD SIDE HEIGHTS	24", 30", 36", 42"	24", 30", 36", 42"
STANDARD TAILGATE HEIGHTS	30", 36", 42", 48"	30", 36", 42", 48"
STANDARD INSIDE WIDTH	86" to 88" trapezoidal design	86" to 88" trapezoidal design
STANDARD HOIST SYSTEM	Front Mount Telescopic	Front Mount Telescopic
OPTIONAL HOIST SYSTEM	Underbody Hoist	Underbody Hoist

MATERIALS

SPECIFICATIONS

TRADITIONAL BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

	HS Light duty dump body for single axle trucks	HT Medium duty dump body for tandem, lift axle trucks	HT-NE Heavy duty dump body for tandem, lift axle trucks	
MATERIALS	3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing	TOP RAIL
	3/16" – 44-W	3/16" – 44-W	3/16" – 44-W	SIDES
	10g (0.134") – A-36	10g (0.134") – A-36	10g (0.134") – A-36	SIDE POSTS
	3/16" – 44-W	3/16" – 44-W	3/16" – 44-W	FRONT
	1/4" – AR225	1/4" - AR225	4.5 mm (3/16") – HARDOX 450	TAILGATE
	1/4" – AR225	1/4" – AR225	4.5 mm (3/16") – HARDOX 450	FLOOR
	3/16" – 44-W	0.2242" – 44-W	0.2242" – 44-W	SILLS
0.2242" – 44-W (13' 6"+)	1/4" – 44-W (16' 6"+)	1/4" – 44-W (16' 6"+)	SILLS +	
3,220 lbs Based on a 10' x 30" x 36" HS	5,834 lbs Based on a 17' x 48" x 60" HT	5,316 lbs Based on a 17' x 48" x 60" HT-NE	BODY WEIGHT	
9' to 16'	13' to 18'	13' to 18'	STANDARD BODY LENGTHS	
24" to 36"	36" to 54"	36" to 54"	STANDARD SIDE HEIGHTS	
30" to 48"	36" to 60"	36" to 60"	STANDARD TAILGATE HEIGHTS	
86" to 88" trapezoidal design	86" to 88" trapezoidal design	86" to 88" trapezoidal design	STANDARD INSIDE WIDTH	
Front Mount Telescopic	Front Mount Telescopic	Front Mount Telescopic	STANDARD HOIST SYSTEM	
Underbody Hoist	Underbody Hoist	Underbody Hoist	OPTIONAL HOIST SYSTEM	

TRADITIONAL BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

LTT | The industry standard for weight sensitive versatile work

HTT | The industry standard for the roughest work

TOP RAIL	3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing
SIDES	1/8" – HARDOX 450	4.5 mm (3/16") – HARDOX 450
SIDE POSTS	10g (0.134") – A-36	10g (0.134") – A-36
FRONT	1/8" – HARDOX 450	4.5 mm (3/16") – HARDOX 450
TAILGATE	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
FLOOR	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450
SILLS	1/4" – 44-W	1/4" – 44-W
SILLS +	8" or 10" I-Beams – (Optional)	8" or 10" I-Beams – (Optional)
BODY WEIGHT	4,796 lbs Based on a 17' x 48" x 60" LTT	5,867 lbs Based on a 17' x 48" x 60" HTT
STANDARD BODY LENGTHS	10' to 23'	10' to 23'
STANDARD SIDE HEIGHTS	36" to 72"	36" to 72"
STANDARD TAILGATE HEIGHTS	36" to 72"	36" to 72"
STANDARD INSIDE WIDTH	86" to 88" trapezoidal design	86" to 88" trapezoidal design
STANDARD HOIST SYSTEM	Front Mount Telescopic	Front Mount Telescopic
OPTIONAL HOIST SYSTEM	Underbody Hoist	Underbody Hoist

MATERIALS

SPECIFICATIONS

ULTRA

BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

One Ton | Premier light-weight drop side body

Contractor | Premier light-weight double drop side body

	One Ton Premier light-weight drop side body	Contractor Premier light-weight double drop side body	
	11g (1/8") – Domex 100W	11g (1/8") – Domex 100W	SIDES
	11g (1/8") – Domex 100W	11g (1/8") – Domex 100W	SIDE POSTS
MATERIALS	11g (1/8") – Domex 100W	11g (1/8") – Domex 100W	FRONT
	11g (1/8") – Domex 100W	11g (1/8") – Domex 100W	TAILGATE
	4.5 mm (3/16") – HARDOX 450	1/4" – HARDOX 450	FLOOR
	8" C-Channel	10" C-Channel with support flange	SILLS
	*Optional C5" over C4"	NONE	SUB-FRAME
	1,961 lbs Based on a 11' x 15" x 24" One ton (with sub-frame)	3,053 lbs Based on a 14' x 15" x 24" Contractor (double drop sides)	BODY WEIGHT
SPECIFICATIONS	8' 6" to 12' 6"	13' to 18'	STANDARD BODY LENGTHS
	12", 15", 18"	12", 15", 18", 20"	STANDARD SIDE HEIGHTS
	20", 24", 28"	20", 24", 28"	STANDARD TAILGATE HEIGHTS
	88"	88"	STANDARD INSIDE WIDTH
	Front Mount Telescopic (6" recess)	Front Mount Telescopic (12" recess)	STANDARD HOIST SYSTEM
	Underbody Hoist	Underbody Hoist	OPTIONAL HOIST SYSTEM

* Sub-Frame Package Available

STAINLESS STEEL

SS201 & SS304 BODY LINE



THE BODIES SHOWN MAY HAVE DEALER INSTALLED OPTIONS.

SSM1/SSM4 | Quality SS201 & SS304 designs for the municipal market

BODY OPTIONS

TOP RAIL	7g (3/16") – SS201/SS304 2B (one piece with dirt shedding)	10g (1/8") – SS201/SS304 2B (one piece with dirt shedding)	MATERIALS
SIDES	7g (3/16") – SS201/SS304 2B	10g (1/8") – SS201/SS304 2B	
SIDE POSTS	NONE	10g (1/8") – SS201/SS304 2B	
FRONT	7g (3/16") – SS201/SS304 2B	10g (1/8") – SS201/SS304 2B	
TAILGATE	7g (3/16") – SS201/SS304 2B	3-panel or 6-panel design	
FLOOR	4.5 mm (3/16") – HARDOX 450	7g (3/16") – SS201/SS304 2B / 1/4" – HARDOX 450	
SILLS	3/16" Domex 100W	7g (3/16") – SS201/SS304 2B	
BODY WEIGHT	2877 lbs Based on a 10' x 30" x 36" SSM4		SPECIFICATIONS
STANDARD BODY LENGTHS	8' 6" to 17' 0"	—	
STANDARD SIDE HEIGHTS	24", 30", 36", 42", 48"	—	
STANDARD TAILGATE HEIGHTS	30", 36", 42", 48", 54"	—	
STANDARD FRONT HEIGHT	86" to 88" trapezoidal design	—	
STANDARD HOIST SYSTEM	Front Mount Telescopic	Underbody Hoist	

ONLY BEAU-ROC DELIVERS “THE DIAMOND STANDARD”



- Responsive custom design with efficient, on-time delivery from modern 60,000 sq. ft. facility
- Maximum productivity with the original Diamond sidewall profile
- More years and more miles of service with HARDOX 450 steel
- Lowest total operating cost for the life of your truck

A ROCK SOLID INVESTMENT


- **More pay per load:** No posts and braces means less weight without losing cubic capacity
- **100% HARDOX 450 steel body:** Proven wear-resistance for best in industry durability
- **Save on every mile:** Up to 7% fuel savings
- **Less wear, fewer repairs:** Diamond profile flexes instead of breaking under normal stresses
- **Quicker clean-outs:** One-piece tapered floor eliminates catch points for loads
- **Faster delivery:** Fewer weld points save time in production
- **The best look for your business:** Clean, smooth sidewalls for signage and decals


NEED A QUOTE NOW?

Our detailed product database allows us to configure your order in real time. We provide custom quotations to our dealers quickly, then follow through with a seamless flow of production details for manufacturing.



300 Universelle Street
Vars, Ontario, Canada K0A 3H0
Tel: 613.443.0044 – Fax: 613.443.1138

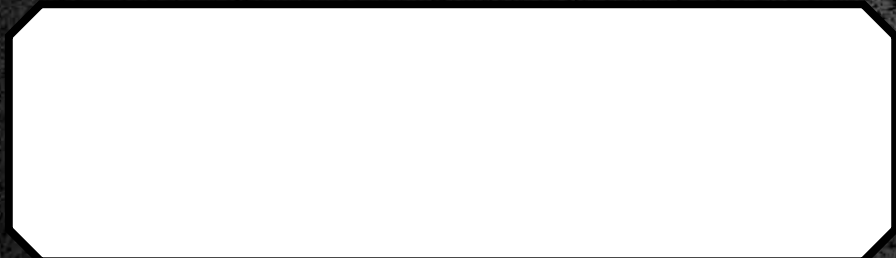

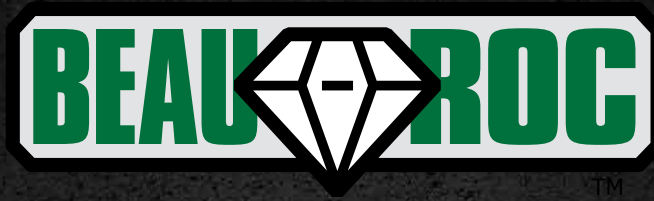

WWW.BEAUROC.COM



STAINLESS STEEL BODY LINE

PRODUCT CATALOGUE

STAINLESS STEEL

BODY LINE



SSM1/SSM4 | Quality SS201 & SS304 designs for the municipal market

BODY OPTIONS

TOP RAIL	7g (3/16") – SS201/SS304 2B (one piece with dirt shedding)	10g (1/8") – SS201/SS304 2B (one piece with dirt shedding)	MATERIALS	
SIDES	7g (3/16") – SS201/SS304 2B	10g (1/8") – SS201/SS304 2B		
SIDE POSTS	NONE	10g (1/8") – SS201/SS304 2B		
FRONT	7g (3/16") – SS201/SS304 2B	10g (1/8") – SS201/SS304 2B		
TAILGATE	7g (3/16") – SS201/SS304 2B	3-panel or 6-panel design		
FLOOR	4.5 mm (3/16") – HARDOX 450	7g (3/16") – SS201/SS304 2B / 1/4" – HARDOX 450		
SILLS	3/16" Domex 100W	7g (3/16") – SS201/SS304 2B		
BODY WEIGHT	2877 lbs Based on a 10' x 30" x 36" SSM4			
STANDARD BODY LENGTHS	8' 6" to 17' 0"	—		SPECIFICATIONS
STANDARD SIDE HEIGHTS	24", 30", 36", 42", 48"	—		
STANDARD TAILGATE HEIGHTS	30", 36", 42", 48", 54"	—		
STANDARD FRONT HEIGHT	86" to 88" trapezoidal design	—		
STANDARD HOIST SYSTEM	Front Mount Telescopic	Underbody Hoist		

SSM1/SSM4 Available Options:

- Coal doors
- Double-acting tailgate
- Asphalt tail
- 10" long sills
- Hook-lift frame
- Tapered sides
- Tarp rails
- Underbody Hoist System

MATERIALS LEGEND: TENSILE STRENGTH BY GRADE OF STEEL MEASURED IN PSI

HARDOX 450 – 215,000

Domex 100W – 115,000*

SS201 2B – 95,000

SS304 2B – 74,700

*Weather resistant steel.



300 Universelle street
Vars, Ontario, Canada K0A 3H0
Tel: 613.443.0044 – Fax: 613.443.1138



WWW.BEAUROC.COM



MULTI-PURPOSE BODY LINE

PRODUCT CATALOGUE



MPLD

Multi-Purpose Light Duty
Municipality & Landscaping



MPHD

Multi-Purpose Heavy Duty
All Purpose Body for Rip-Rap, Debris,
Scrap Steel Hauling & Demolition



Multi-Purpose Medium Duty
Municipality & Landscaping

MPMD



Multi-Purpose Chipper Body
Municipality, Landscaping Utility Work & Tree Service

CHIPPER



MPLD

MPMD

MPHDO*

CCS

CCL

MATERIALS		TOP RAIL		SIDES		FRONT		TAILGATE		FLOOR		SILLS		BODY WEIGHT	
3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing	4" x 4" x 1/4" tubing	Not applicable	Not applicable	3" x 4" x 3/16" tubing	3" x 4" x 3/16" tubing	4" x 4" x 1/4" tubing	4.5 mm (3/16") – HARDOX 450	4.5 mm (3/16") – HARDOX 450	4 mm (5/32") – HARDOX 450	1/4" – HARDOX 450	8" I-beam with support flange	8" formed or channel long sills – 3/16" 44W	8" formed or channel long sills – 3/16" 44W	2,845 lbs Based on a 12' x 48" x 16" MPLD
10g (0.134") – A-36	3/16" – Domex 100W	4.5 mm (3/16") – HARDOX 450	10g (0.134") – A-36	10g (0.134") – A-36	10g (0.134") – A-36	10g (0.134") – A-36	11g (0.1196") – Domex 100W	11g (0.1196") – Domex 100W	11g (0.1196") – Domex 100W	11g (0.1196") – Domex 100W	3/16" – Domex 100W	8" C-channel with support flange	8" formed or channel long sills – 3/16" 44W	8" formed or channel long sills – 3/16" 44W	3,500 lbs Based on a 15' x 48" x 32" MPMD
10g (0.134") – A-36	3/16" – Domex 100W	4.5 mm (3/16") – HARDOX 450	10g (0.134") – A-36	10g (0.134") – A-36	10g (0.134") – A-36	10g (0.134") – A-36	4 mm (5/32") – HARDOX 450	4 mm (5/32") – HARDOX 450	4 mm (5/32") – HARDOX 450	4 mm (5/32") – HARDOX 450	1/4" – HARDOX 450	8" I-beam with support flange	8" formed or channel long sills – 3/16" 44W	8" formed or channel long sills – 3/16" 44W	8,950 lbs Based on a 23' x 60" x 96" MPHDO
12g (0.1046") – A-36	11g (0.1196") – Domex 100W	4 mm (5/32") – HARDOX 450	11g (0.1196") – Domex 100W	11g (0.1196") – Domex 100W	11g (0.1196") – Domex 100W	11g (0.1196") – Domex 100W	1/4" – HARDOX 450	1/4" – HARDOX 450	1/4" – HARDOX 450	1/4" – HARDOX 450	1/4" – HARDOX 450	8" I-beam with support flange	8" formed or channel long sills – 3/16" 44W	8" formed or channel long sills – 3/16" 44W	4,260 lbs Based on a 14' x 84" x 32" CCS
3/16" – 44-W	3/16" – Domex 100W	4 mm (5/32") – HARDOX 450	10g (0.134") – A-36	10g (0.134") – A-36	10g (0.134") – A-36	10g (0.134") – A-36	1/4" – HARDOX 450	1/4" – HARDOX 450	1/4" – HARDOX 450	1/4" – HARDOX 450	1/4" – HARDOX 450	8" I-beam with support flange	8" formed or channel long sills – 3/16" 44W	8" formed or channel long sills – 3/16" 44W	3,880 lbs Based on a 14' x 80" x 20" CCL
8" C-channel with support flange	8" C-channel with support flange	8" I-beam with support flange	8" formed or channel long sills – 3/16" 44W	8" formed or channel long sills – 3/16" 44W	8" formed or channel long sills – 3/16" 44W	8" formed or channel long sills – 3/16" 44W	8" I-beam with support flange	8" I-beam with support flange	8" I-beam with support flange	8" I-beam with support flange	8" I-beam with support flange	8" I-beam with support flange	8" I-beam with support flange	8" I-beam with support flange	87"

SPECIFICATIONS		STANDARD INSIDE WIDTH		STANDARD BODY LENGTHS		STANDARD SIDE HEIGHTS		STANDARD TAILGATE HEIGHTS		STANDARD FRONT HEIGHTS		STANDARD HOIST SYSTEM	
2,845 lbs Based on a 12' x 48" x 16" MPLD	3,500 lbs Based on a 15' x 48" x 32" MPMD	8,950 lbs Based on a 23' x 60" x 96" MPHDO	4,260 lbs Based on a 14' x 84" x 32" CCS	3,880 lbs Based on a 14' x 80" x 20" CCL	87"	87"	87"	87"	87"	87"	87"	87"	87"
10' to 18'	10' to 18'	15' to 30'	10' to 18'	10' to 18'	10' to 18'	10' to 18'	10' to 18'	10' to 18'	10' to 18'	10' to 18'	10' to 18'	10' to 18'	10' to 18'
48", 54" & 60"	48", 54" & 60"	60", 66", 72", 84" & 96"	60", 66", 72", 84"	60", 72", 84"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"
16", 32", 48", 54" & 60"	16", 32", 48", 54" & 60"	60", 66", 72", 84" & 96"	20" & 32"	20" & 32"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"	60", 66", 72", 84" & 96"
Same as side height	Same as side height	Same as side height	Same as side height	Same as side height	Same as side height	Same as side height	Same as side height	Same as side height	Same as side height	Same as side height	Same as side height	Same as side height	Same as side height
Underbody hoist	Underbody hoist	Front mount telescopic	Front mount & underbody hoist	Front mount & underbody hoist	Underbody hoist	Underbody hoist	Underbody hoist	Underbody hoist	Underbody hoist	Underbody hoist	Underbody hoist	Underbody hoist	Underbody hoist

MPLD & MPMD Options:

- Side door: 10g (0.134") A-36 with 3" x 4" x 3/16" tubing x 52" wide
- Double barn (swing) tailgate
- Upper split mesh barn door (available with 16" double acting tailgate only)
- Removable roof top (2 sections)

Chipper Body Options:

- Removable top model – CCL-RT (60" side height only)
- Ladder insert (available on both CCS & CCL models)
- Double barn door (available on both CCS & CCL models)

* Non-Dumping Model Available (MPHDO)

Grapple hooks shown with MPMD & MPHDO are dealer installed systems

MATERIALS LEGEND:

A-36 – 65,000 psi	44W – 80,000 psi
Domex 100W – 115,000 psi *	HARDOX 450 – 215,000 psi
*Weather resistant steel	psi value = typical tensile



300 Universelle Street
 Vars, Ontario, Canada K0A 3H0
 Tel: 613.443.0044 – Fax: 613.443.1138